




SUBMITTAL SHEET
943 SERIES

**In-Floor Trench
Convection Heaters**

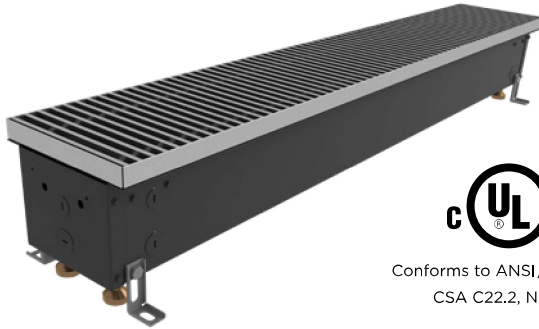

Conforms to ANSI/UL2021 &
CSA C22.2, NO. 46

CAPACITIES

500W through 1.25KW
Modularized to 2.5KW & Above
208, 240 or 277V
1Ø

See Selection Chart for all Options

943 SERIES - IN-FLOOR TRENCH CONVECTION HEATERS

| | |
|---------------|--|
| JOB NAME: | |
| LOCATION: | |
| ARCHITECT: | |
| ENGINEER: | |
| CONTRACTOR: | |
| SUBMITTED BY: | |
| DATE: | |

| TAG | QTY. | CATALOG NUMBER | HEATER | | | AMPS | BUILT-IN CONTROL | GRILLE TYPE | GRILLE FINISH |
|-----|------|----------------|--------|-------|---|------|------------------|-------------|---------------|
| | | | KW | VOLTS | Ø | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

| ACCESSORIES AND CONTROLS | TAG | QTY. | CATALOG NUMBER | DESCRIPTION |
|--------------------------|-----|------|----------------|-------------|
| | | | | |
| | | | | |
| | | | | |

| | |
|---------------|------|
| SUBMITTED BY: | DATE |
| | |
| | |
| | |
| | |

| | |
|--------------|------|
| APPROVED BY: | DATE |
| | |
| | |
| | |
| | |

ARCHITECT'S AND ENGINEER'S SPECIFICATIONS*

Furnish and install, where indicated on plans, 943 Series convector type heaters, suitable for continuous operation, as manufactured by by Indeeco®.

CABINET/GRILLES Shall be 16-gauge (.060" min.) galvanized steel enclosure, with a heavy-duty gauge, extruded, architectural aluminum bar grilles. The unit shall have the capacity to hold over two times the allowed UL listing weight. Each grille bar shall be of concave design. The grilles shall be either flush mount or surface mount, and come in multiple color/finish options.

SIZE Heaters shall be of zero vertical profile, with the entire enclosure recessed in the floor (61/8" x 77/8") and available in standard lengths from 2-5 feet, with modular lengths above 5 feet.

HEATING LENGTHS, VOLTAGES, WATTAGE Heater lengths, voltages and wattage capacities shall be as indicated on the plans.

FINISH The grille shall be finished with polyester powder paint or anodized phosphate coating to resist corrosion.

WATER AND DEBRIS MANAGEMENT Heater shall include gaskets/seals for all control compartments in order to deter the entrants of water and debris. Each unit shall include a debris catch screen just below the grille, that will impede debris from falling inside of the unit and onto the elements.

HEATING ELEMENTS The nickel-chromium heating element wire shall be encased in a magnesium phosphate material inside a steel sheath for maximum, trouble-free element life. Aluminum fins shall be pressure bonded to the steel sheath. Elements shall be centered anchored and shall float freely at each end through high-temperature Noryl bushings. Stainless steel elements with aluminum fins shall also be available.


WIRING, ELECTRICAL, SAFETY Units shall be UL listed with gasketed junction boxes, end-to-end wire way, and multiple knockout locations for field wiring entry on either end or bottom. Heaters shall contain a dual safety limit chain standard, with both manual and automatic reset. All optional factory, build-in controls will be included in every unit, with no separate control sections needed unless otherwise indicated on the plans.

MOUNTING Heaters are listed for three mounting options, out of the box: frame mounted, concrete pour, direct on slab with legs. The heater shall come standard with 4 adjustable leveling legs, and configurable with mounting legs for additional securing points.

OPTIONAL BUILT-IN CONTROLS Power on/off switch, power relay, low-voltage control relays, and, singly or in combination, may be specified for factory installation in heaters. All optional factory build-in controls, and manual reset, are accessible via removal of the junction box covers.

**Indeeco reserves the right to change specifications without prior notice.*

How To Order

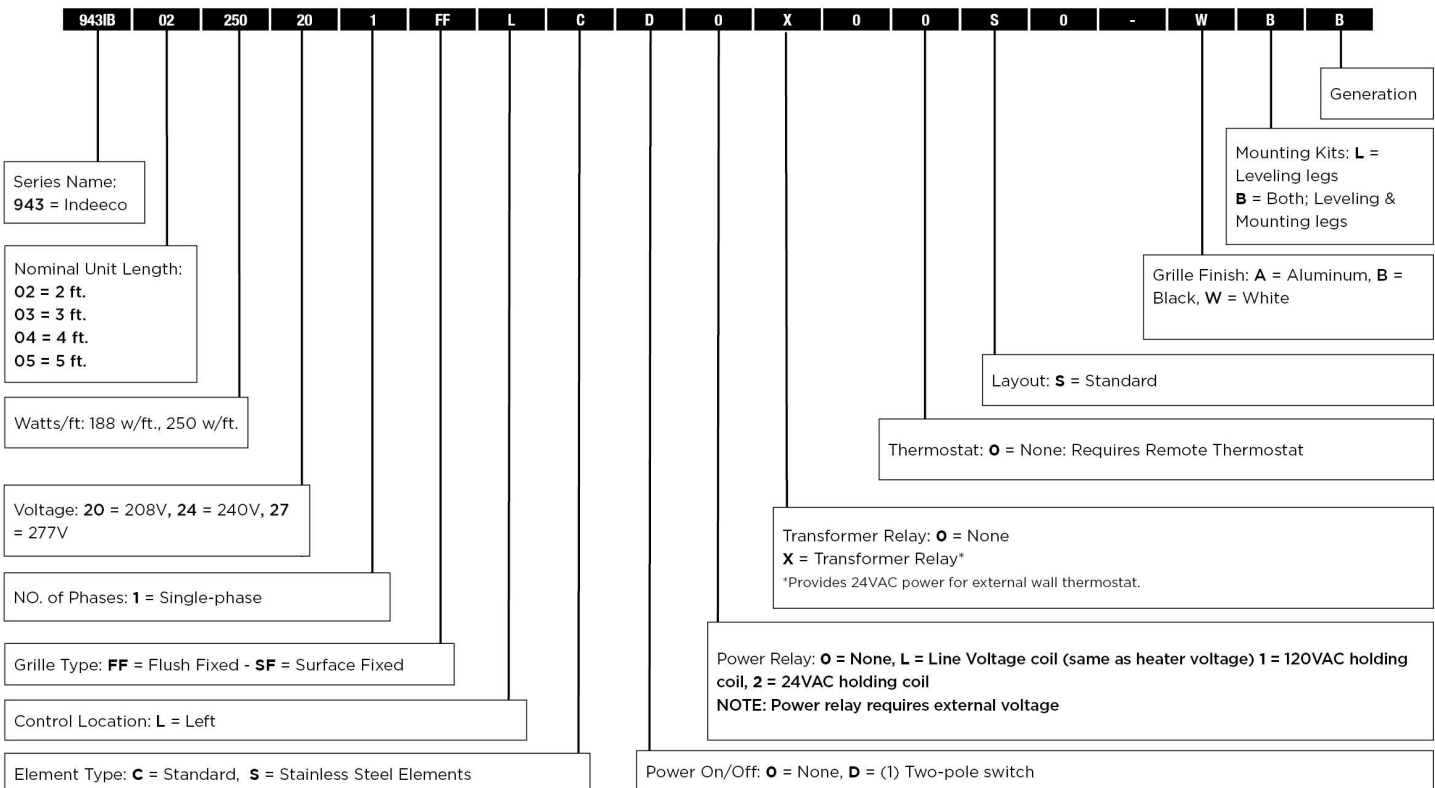

Specifications

| CATALOG # | LENGTH | WATTS PER FOOT | Total Watts (BTUs) | AMPERAGE | | | # OF ELEMENTS | SHIP WEIGHT LBS. |
|-------------|--------|----------------|--------------------|----------|-------|-------|---------------|------------------|
| | | | | 208 V | 240 V | 277 V | | |
| 943IB 02188 | 2' | 188 | 376 (1282) | 1.8 | 1.6 | 1.4 | 1 | 30 |
| 943IB 02250 | | 250 | 500 (1705) | 2.4 | 2.1 | 1.8 | | |
| 943IB 03188 | 3' | 188 | 564 (1923) | 2.7 | 2.4 | 2.0 | | 40 |
| 943IB 03250 | | 250 | 750 (2558) | 3.6 | 3.1 | 2.7 | | |
| 943IB 04188 | 4' | 188 | 752 (2564) | 3.6 | 3.1 | 2.7 | | 52 |
| 943IB 04250 | | 250 | 1000 (3410) | 4.8 | 4.2 | 3.6 | | |
| 943IB 05188 | 5' | 188 | 940 (3205) | 4.5 | 3.9 | 3.4 | 60 | |
| 943IB 05250 | | 250 | 1250 (4263) | 6.0 | 5.2 | 4.5 | | |

NOTES: All models are NON-STOCK made-to-orders ordering, specify quantity, catalog number, voltage, wattage, optional controls, and color. Consult sales representative for lead times.

For all sizes above 5' the units can be modularized together — i.e. for a 10' two 5'. Reference instruction manual for details.

BLANK & CORNER SECTIONS

| CATALOG NUMBER | DESCRIPTION | DIMENSIONS | SHIP WEIGHT LBS |
|----------------|---------------------------------------|--------------------------|-----------------|
| BIE-BLK01#-** | 1' Blank Section | See unit dimension chart | 12 |
| BIE-BLK18#-** | 1.5' Blank Section | See unit dimension chart | 18 |
| BIE-BLK02#-** | 2' Blank Section | See unit dimension chart | 24 |
| BIE-BLK03#-** | 3' Blank Section | See unit dimension chart | 32 |
| BIE-BLK04#-** | 4' Blank Section | See unit dimension chart | 40 |
| BIE-BLK05#-** | 5' Blank Section | See unit dimension chart | 48 |
| BIE-CNR90XX | 90° Corner Blank Section (see note A) | | 15 |

NOTES: All models are NON-STOCK made-to-order ordering and will need to be configured.

Consult sales representative for additional details and leadtimes.



- This is the grille type identifier. Add suffix FF for Flush Fixed or SF for surface fixed. Default is FF.

** - This is the grille finish identifier. Add A for Aluminum, W for White, B for Black. Default is Aluminum

A - corner sections are only available without grilles.

| SUFFIX ADDITION TO BASIC CAT. NO. (SEE HOW TO ORDER) | OPTIONAL BUILT-IN CONTROLS | RATINGS |
|--|----------------------------|---|
| DS | Power On/Off Switch | Double-pole, rated 20 amp @ 120-277 VAC. |
| TR | Transformer Relay | Single-pole, low voltage relay with built-in transformer (24 VAC control), rated 25 amps @ 120-240 VAC and 22 amps @ 277 VAC. |
| PR | Power Relay | Single-pole magnetic relay, rated 25 amps @ 120-600 VAC. Specify control voltage. |

Dimensions

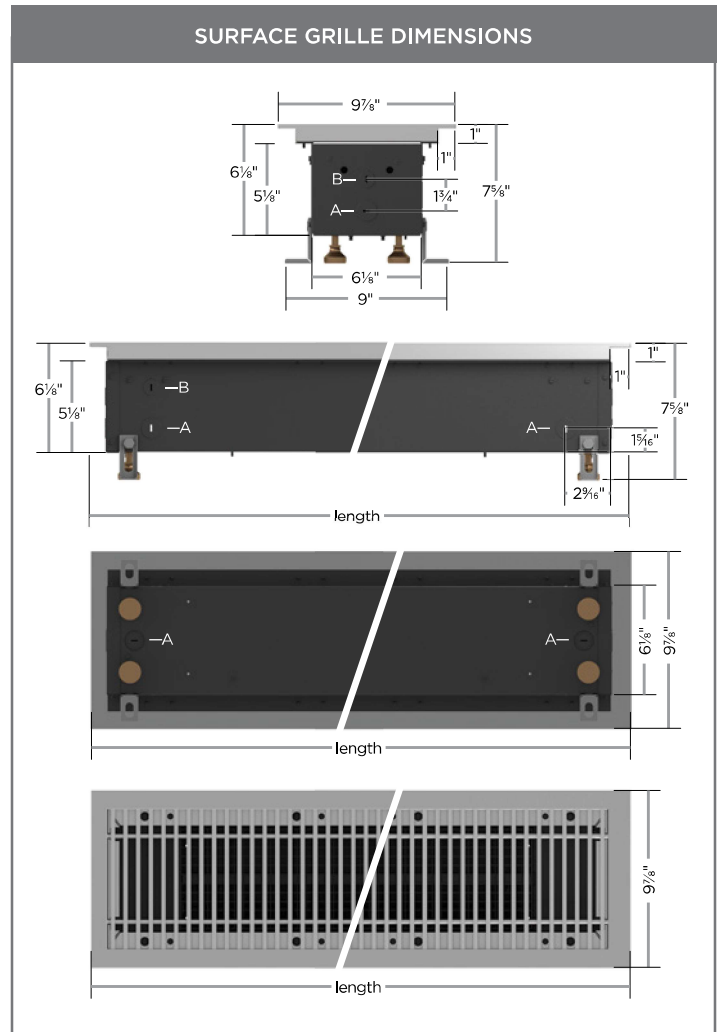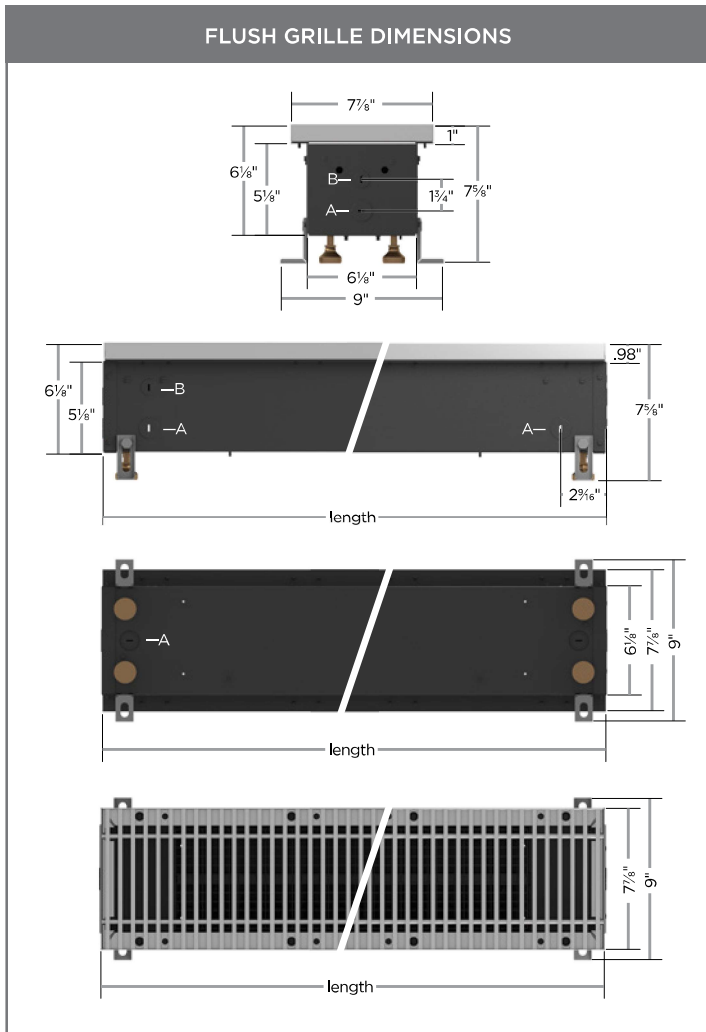

| Size | 2 ft. | 3 ft. | 4 ft. | 5 ft. |
|-------------------------|-----------------|-----------------|-------------------|-------------------|
| Length | 24 1/8" (613mm) | 36 1/8" (918mm) | 48 1/8" (1,223mm) | 50 1/8" (1,528mm) |
| Grille Width | 7 7/8" (200mm) | | | |
| Cabinet Width | 6 1/8" (156mm) | | | |
| Depth | 6 1/8" (156mm) | | | |
| A - Diameter (Nested) | 1/2" (3/4") | | | |
| B - Diameter | 1/2" | | | |
| Leveling Leg Adjustment | 1-2" (26-52mm) | | | |

| Size | 2 ft. | 3 ft. | 4 ft. | 5 ft. |
|-------------------------|-----------------|-----------------|-------------------|-------------------|
| Length | 26 1/8" (664mm) | 38 1/8" (969mm) | 50 1/8" (1,273mm) | 62 1/8" (1,578mm) |
| Grille Width | 9 7/8" (251mm) | | | |
| Cabinet Width | 6 1/8" (156mm) | | | |
| Depth | 6 1/8" (156mm) | | | |
| A - Diameter (Nested) | 1/2" (3/4") | | | |
| B - Diameter | 1/2" | | | |
| Leveling Leg Adjustment | 1-2" (26-52mm) | | | |

No matter the industry or application, Indeco® has a robust portfolio of innovative, reliable, high-performance comfort heating and ventilation solutions for all your heating needs.